


# Fiber Protection Sleeves



## Type Variation

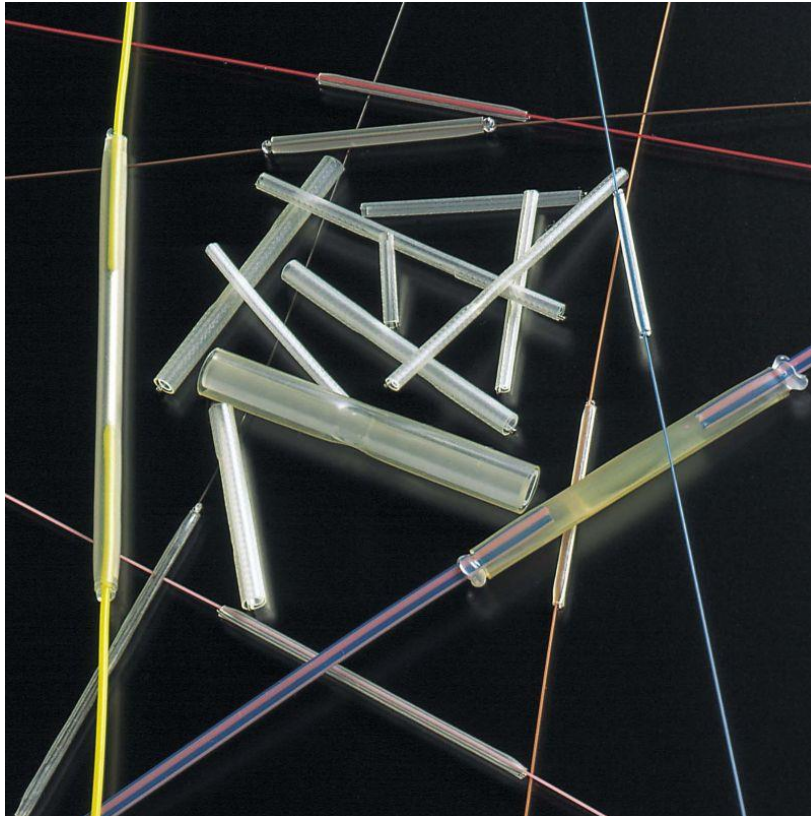

FP-03



FP-03(L=40)



FP-04(T)



FP-05



FPS04-30



FPS08-28



FPS24-40



FPS01-400-12



FPS01-400-15



FPS01-400-20



FPS01-400-25



FPS01-400-34



FPS01-400-40



FPS01-900-15



FPS01-900-20



FPS01-900-25



FPS01-900-34




FPS01-900-45

Full-scale

## Specifications

Material	Outer tube	FP-03 series / FPS01 series	Polyolefin based on Polyethylene	
		FP-04(T) / FP-05	Ethylene-Vinyl Acetate	
		FPS04-30 / FPS08-28 / FPS24-40	Polyolefin based on Polyethylene	
	Inner tube		Ethylene-Vinyl Acetate	
	Strength member	FP-03 series / FPS01 series		Stainless steel
		FP-04(T) / FP-05		Heat-resistant glass
FPS04-30/FPS08-28/FPS24-40		Heat-resistant glass		
Operation condition (after shrink)			-10 to 50 deg C, 0 to 95%RH (Non dew)	
Storage condition (before shrink)			-40 to 60 deg C, Non dew	
Reliability Test			Telcordia GR-1380	

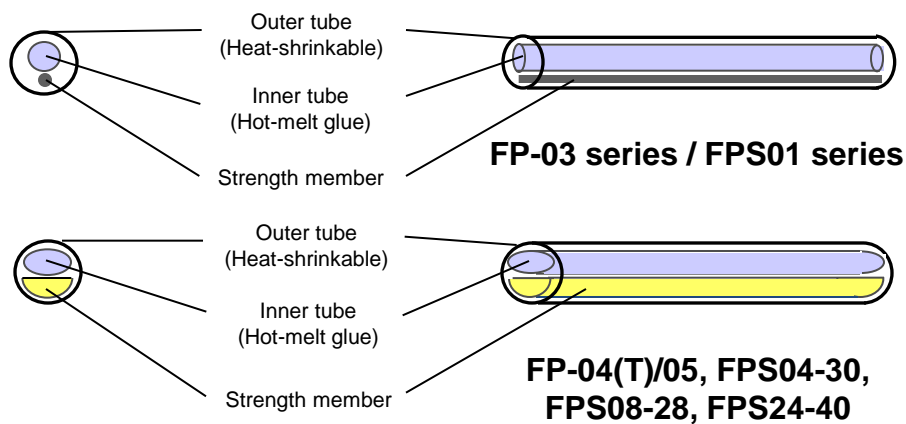

Model	Sleeve length	Strength member length	Diameter after shrink	Fiber count	Recommended cleave length	Coating diameter
FP-03	60mm	60mm	3.1mm	Single	16mm	0.25mm to 0.9mm
FP-03(L=40)	40mm	40mm	3.1mm	Single	10mm	0.25mm to 0.9mm
FP-04(T)	40mm	40mm	4.0mm	1 to 8	10mm	0.25mm (thickness)
FP-05	40mm	40mm	4.5mm x 4.0mm	1 to 12	10mm	0.25mm (thickness)
FPS04-30	30mm	30mm	2.4mm	1 to 4	10mm	0.25mm (thickness)
FPS08-28	28mm	28mm	3.3mm x 2.7mm	1 to 8	10mm	0.25mm (thickness)
FPS24-40	40mm	40mm	8.0mm x 4.0mm	1 to 24	10mm	0.25mm (thickness)
FPS01-400-12	12mm	13mm	1.5mm	Single	4mm	up to 0.4mm
FPS01-400-15	15mm	16mm	1.5mm	Single	5mm	up to 0.4mm
FPS01-400-20	20mm	21mm	1.5mm	Single	8mm	up to 0.4mm
FPS01-400-25	25mm	26mm	1.5mm	Single	10mm	up to 0.4mm
FPS01-400-34	34mm	35mm	1.5mm	Single	15mm	up to 0.4mm
FPS01-400-40	40mm	41mm	1.5mm	Single	16mm	up to 0.4mm
FPS01-900-15	15mm	16mm	2.3mm	Single	4mm	up to 0.9mm
FPS01-900-20	20mm	21mm	2.3mm	Single	6mm	up to 0.9mm
FPS01-900-25	25mm	26mm	2.3mm	Single	6mm	up to 0.9mm
FPS01-900-34	34mm	35mm	2.3mm	Single	13mm	up to 0.9mm
FPS01-900-45	45mm	46mm	2.3mm	Single	16mm	up to 0.9mm

Specifications and descriptions are subject to change without prior notice. © 2012 Fujikura Ltd.

## Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan

Phone : +81-3-5606-1164 Fax : +81-3-5606-1534 <http://www.fujikura.co.jp>

## Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967

Phone : +65-6-278-8955 Fax : +65-6-278-0965 <http://www.fujikura.com.sg>

## Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK

Phone : +44-20-8240-2000 Fax : +44-20-8240-2010 <http://www.fujikura.co.uk>

## AFL

260, Parkway East, Duncan, SC29334, USA

Phone : +1-800-235-3423 Fax : +1-800-926-0007 <http://www.aflglobal.com>

## Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area,

Shanghai 200120, CHINA

Phone : +86-21-6841-3636 Fax : +86-21-6841-2070 <http://www.fujikura.com.cn>